





NOMINAL GENERATOR SET PERFORMANCE

PEEKER ENERGY CORPORATION engineers an electricity power generator unit using a Titan 130 gas turbine built by Solar Turbines International (a Caterpillar Company) fueled by pure hydrogen gas generator “on demand” and “on-site”. The system is a closed loop arrangement using inert gases, such as Argon and Helium. The argon gas (over 92%) is heated by hydrogen/oxygen mix in a specially designed burner, while the helium (8%) acts as a coolant to the turbine blades. The Titan 130 turbine/generator set is designed to provide over 15 MW of power and may be mobile or fixed.

Available Power

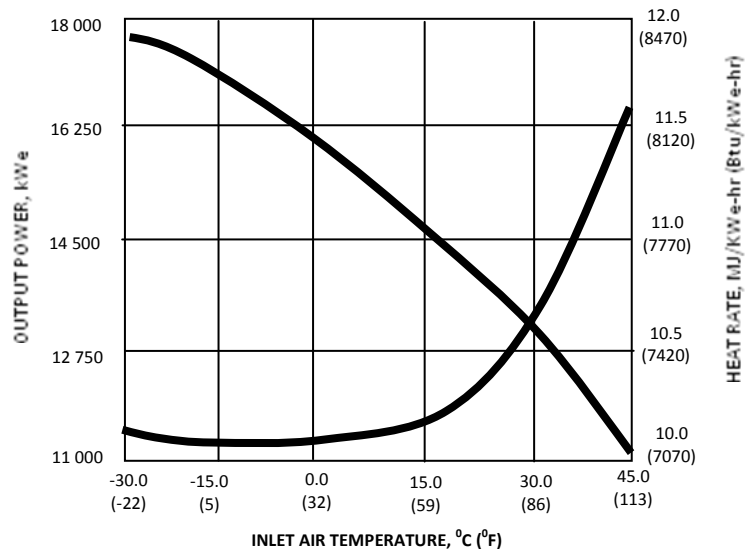

Typical Dimensions

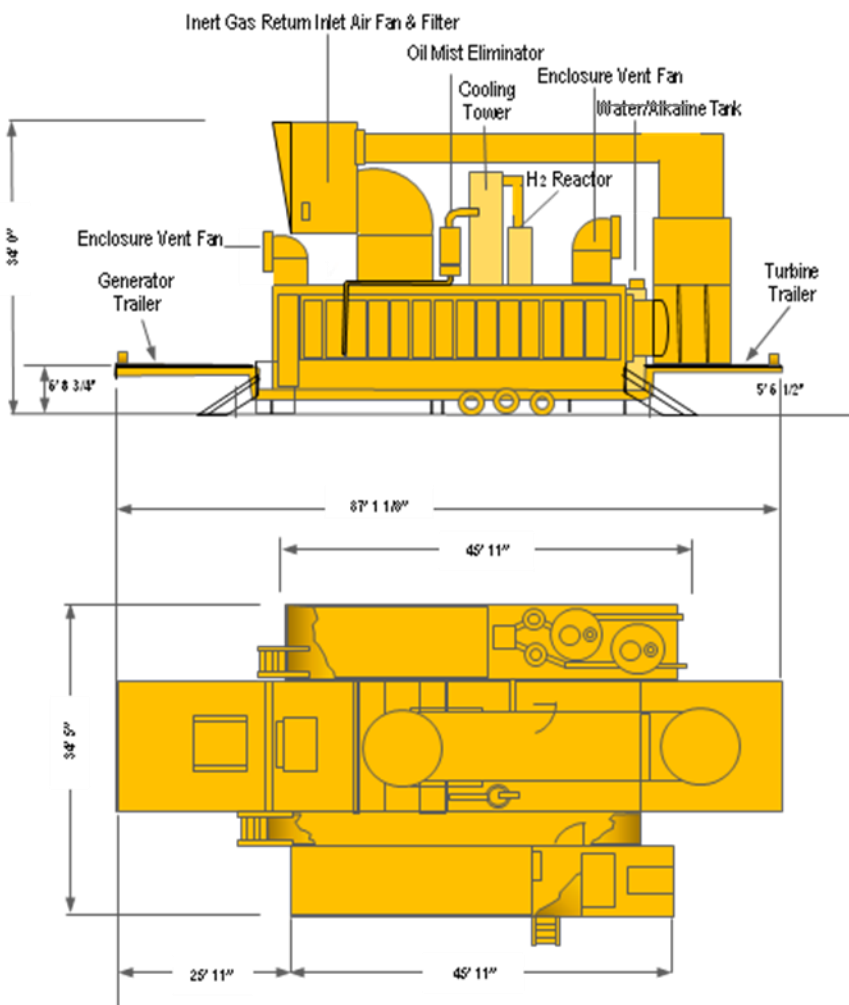

Output Power (for natural gas – Solar Data):

ISO: 15⁰C (59⁰F), sea level 15,000 kWe

Heat Rate 10 230 kJ/kWe-hr
(9,695 Btu/kWe-hr)

Exhaust Flow (Air) 179 250 Kg/hr
(395,180 lb/hr)

Exhaust Temp (natural gas) 495⁰C
(925⁰F)

Higher Temp with Hydrogen/Oxygen burning

GENERAL DIMENSIONS (INSTALLATION):

Length: 100 ft (30.48 m)

Width: 54.5 ft (16.6 m)

Height: 40 ft (12.2 m)

DRY WEIGHT (turbine only), Kg (lb):

73 668 (162,409)

FOR MORE INFORMATION

Telephone: +1 760 845-2184

Telefax: +1 760 683 3075

E-mail: info@peeker-corporation.com

Internet: <http://peeker-corporation.com>



General Specifications

Gas Turbine

- Titan™ 130 Industrial, Single-Shaft
- Axial Compressor
- 14 Stages
- Variable Geometry
- Vertically Split Case
- Compression Ratio: 16:1
- Speed: 11,197/11,170 rpm (50/60 Hz)
- Annular Combustion Chamber
- Hydrogen/Oxygen mix, no emission
- 14 fuel injectors (different configuration may vary)
- Proximity Probe Vibration Transducers
- Turbine
- 3 Stage, Axial Flow
- Argon/He Inert Gas Mix intake, Closed Loop
- Speed: 11,197/11,170 rpm (50/60 Hz)

Main Reduction Drive

- Epicyclic
- 1500 or 1800 rpm (50 or 60 Hz)
- Acceleration Vibration Transducer

Generator

- Continuous Duty Rating
- Silent Pole, 3 Phase, 6 Wire, Wye Connected, Synchronous with Brushless Exciter
- Open Drip-Proof Construction
- Sleeve Bearings
- Velocity Vibration Transducers
- Permanent Magnet generator
- NEMA Class F Insulation with F Rise

Hydrogen Gas Fuel Generator

- On Site Static Gas Generator
- Water Tank
- Catalyst and alkaline tank with dosimeter
- Pressure gage and temperature monitoring system
- Hydrogen Generator reactor tank (2 per system)
- Cooling tower with water trap and recirculation
- Brim recovery system

Package

- Steel Base Frame with Pans
- Direct-Drive AC Start System
- Hydrogen Gas and Oxygen Gas generation systems on site, with separators
- Hydrogen Turbo burner (under license from Berkeley's Labs)
- ControlLogix Controller
- Standard Display with Discrete Event Log, Strip Chart, Historical Trend, Maintenance Screen
- Gas Turbine and Generator Control
- Vibration and Temperature Monitoring
- CGCM (Combination Generator Control Module) with Load Share, Auto Synchronization, Voltage Control, Reactive Power Control, kW Control
- Integrated Lube Oil System
- Turbine Driven Lube Pump
- Pre/Post Lube Pump
- Back-up Lube Pump
- Air/Oil Cooler
- Integrated Lube Oil Tank
- Lube Oil Tank Heater
- Oil Mist Eliminator
- Simplex Lube Oil Filter
- Documentation
- Drawings
- Quality Control Data Book
- Inspection and Test Plan
- Test Reports
- Operation and Maintenance Manuals
- Factory Testing of Turbine and Package

Optional Equipment

- Generator Options:
 - Standard Voltages: 11,000 V (50 Hz); 12,470, 13,200 or 13,800 V (60 Hz)
- Fuel Systems
 - Liquid
 - Dual (Gas/Liquid)
 - Alternate Fuels (such as naphtha, propane, low BTU gas)
- Lube Oil System
 - Water/Oil Lube Oil Cooler
 - Duplex Lube Oil Filters
 - Vent Flame Trap
- Control System
 - Auxiliary and Remote Display/Control Terminal
 - Heat Recovery Application Interface
 - Serial Link Supervisory Interface
 - Turbine Performance Map
 - Printer/Logger
 - Field Programming Terminal
 - Unfired Waste Heat Recovery System Control (Stand Alone Panel), Import/Export, kW/KVAR Control (Stand Alone Panel)
- Accessory Equipment
 - 120 VDC Battery/Charger System
 - Turbine Cleaning System: On-Crank and On-Line
- Weatherproof Acoustic Enclosure
- Ancillary Equipment
 - Inlet and Exhaust Silencers (Closed Loop)
 - Self Cleaning or Prefilter/Barrier Air Inlet Filter
 - Inlet Evaporative Cooler
 - Inlet Chiller Coils
 - Optional Reactor Hydrogen Generator Tank
 - Brim automatic Dosimeter

INTERNATIONAL OFFICES:

FOR MORE INFORMATION

Telephone: +1 760 845-2184

Telefax: +1 760 683 3075

E-mail: info@peeker-corporation.com

Internet: <http://peeker-corporation.com>